


# FDV dokumentasjon

Endekapper	Typebetegnelse	Varenummer	EAN	EI.nummer
	Endekappe for 2&3 fas, PS-END	2CDL200001R0001	4016779514729	1665951
	Endekappe for 3+N, PS-END1	2CDL200001R0002	4016779570114	1665952
	Endekappe for 1 fas, PS-END 0	2CDL200001R0004	4016779652261	1665953
	Endekappe 1 fas 6mm <sup>2</sup> , END1.1	2CDL200011R0011	4016779638913	1665954

<b>FDV</b>	Samleskinnen er produsert og testet i henhold til IEC/EN 60947-1.	Ingen krav til periodisk vedlikehold.
------------	---	---------------------------------------

Tekniske Data	Busbars PS			
	Suitable for		MCB: S200, S200M, S200P RCD: F200, DDA-blocks	
Electrical Data	Standards	for IEC applications DIN EN 60947-1 VDE 0660 Part 100 – IEC 60947-1:2004		
	Approvals	–		
	Rated voltage U <sub>e</sub>	1P, 2P, 3P, 4P: 690 V AC, 690 V DC		
	Rated frequency	Hz	50 / 60 Hz, DC	
	Current carrying capacity / Phase (35°C ambient temperature)	A	10 mm <sup>2</sup>	16 mm <sup>2</sup>
End feeding $\text{\textcircled{I}}$		63 A	80 A	120 A
Non-end feeding $\text{\textcircled{II}}$		100 A	130 A	160 A
Short-circuit withstand capacity	kA	25 kA in series with fuse NH3 355 A gG 500 V		
Mechanical Data	Housing	light grey, RAL 7035		
	Environmental conditions acc. to	DIN EN 60068		
	Overvoltage category	III		
	Pollution degree	2		
Installation	Cross-Section Busbar	10 mm <sup>2</sup> , 16 mm <sup>2</sup> , 30 mm <sup>2</sup>		
	Mounting position	optional		
	Supply	Feed on terminal of the device (supply side optional) or use of feeder terminal range AST; SZ-ESK		
Accessories	Shock-protection caps	BSK, SZ-BSK		
	Feeder terminals	range AST, SZ-ESK		
	End caps	range END, PS-END, PSB-END		

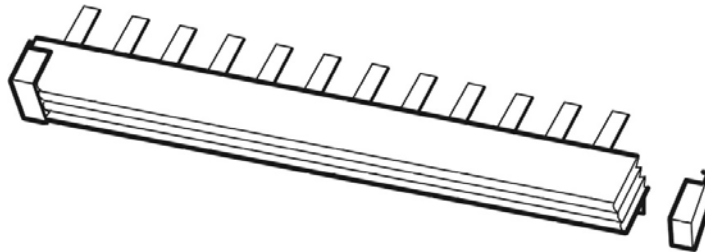

Produsent	Navn	Adresse	Tlf.	E-post
	ABB AS	Bergerveien 12 1396 Billingstad	03500	automasjonsprodukter@no.abb.com