

FDV dokumentasjon

Arbeids-	Typebetegnelse	Varenummer	EAN	El.nummer
strømsut- løser	Arb.strømutl.F2C-A1 AC/DC12-60 Arb.strømutl.F2C-A2 AC110-415V	2CSS200933R0011 2CSS200933R0012	8012542974901 8012542975007	1665791 1665792
F2C-Ax				

FDV


Ingen krav til periodisk vedlikehold.

Tekniske Data

Shunt trip for F 200 RCCBs

				F2C-A1				
Rated voltage	AC	V	12...60					
	DC	V	12...60					
Max release duration		ms	10					
Min. release voltage	AC	V	6					
	DC	V	4.5					
Consumption on release	Ub	V	12 DC	12 AC	24 DC	60 DC	60 AC	
	Ib max	A	0.88	0.65	1.58	5.8	5	
Coil resistance		Ω	5.5					
Terminals		mm ²	2x1.5					
Tightening torque		Nm	0.2					
Dimensions (H x D x W)		mm	85 x 69 x 17.5					
				F2C-A2				
Rated voltage	AC	V	110...415					
	DC	V	110...250					
Max release duration		ms	10					
Min. release voltage	AC	V	75					
	DC	V	55					
Consumption on release	Ub	V	110 DC	110 AC	250 DC	415 AC		
	Ib max	A	0.05	0.03	0.1	0.16		
Coil resistance		Ω	1355					
Terminals		mm ²	2x1.5					
Tightening torque		Nm	0.2					
Dimensions (H x D x W)		mm	85 x 69 x 17.5					

S 2C-UA...
F 2C-A...
S 2C-OVP

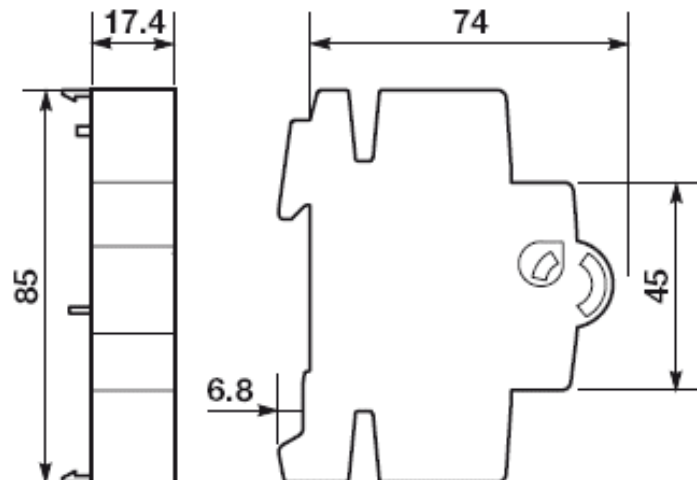

Produsent

Navn

Adresse

Tlf.

E-post

ABB AS

Bergerveien 12
1396 Billingstad

03500

automasjonsprodukter@no.abb.com